



PRODUCT DATASHEET

AerSMASH TYPE: AS2



**AerSMASH for clean indoor air
and quality retention of your products**

AerSMASH

pure improvement.

AerSMASH Type AS2

Type AS2 is suitable for the elimination of bacteria, fungi and odors for spaces with a capacity of +/- 150 m³. The units are equipped as standard with safety barriers, pre-filtering, pre-programmed control, plasma patterns with integrated electrostatic discharge (ESD) and motor.

Housing The boxes are made of high-quality SS 316 material. Including 4x lifting eye

Capacity Suitable for spaces up to 150 M³

Weight 32 kgs



Plug & Play 220-240 V, 50-60 Hz, through 2-pole plug, cable length 1.5 meter

Quarantee 24 months after installation or 36 months after delivery, with the exception of cartridges and pre-filters, which must be replaced according to use.

NFC Units are equipped with a Near Field Communication (NFC) for wireless setting. This is set ex works in accordance with the application at the customer.

Dimensions in mm

L	B	H
1203	503	265

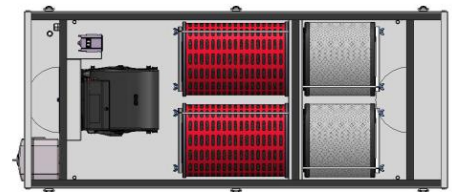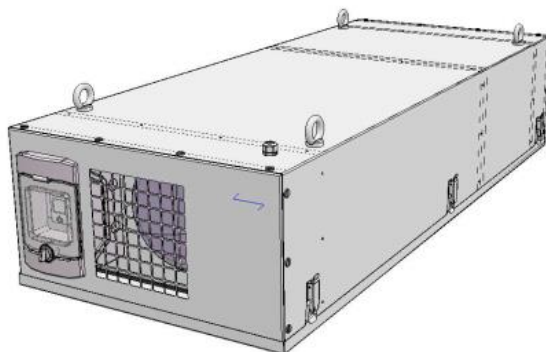

Technical data

Sealing	EPDM	
Motor	EBM Papst DC; max 39Db, 200 Watt	
Cartridge	12V, plastic (ABS), 24 Watt (2x)	
Pre filter	High Efficiency Particulate Air (hepa)	
CE	Ja	Declaration of conformity
Certifications	NEN-EN-IEC 60335-1:2012 EN60335-2-65:2003 +A1:2008+ NEN-EN-IEC C1: 2004+A11:2012 EN50366:2003 +A1:2006 or EN 62233:2008 NEN-EN-IEC 60730-1:2011 EN 60335 DIN EN 60335-2-65:2003 EMC (2004/108/EC); EMC (2006/95/EC) Protection Class III Appliance	