



PRODUCT DATASHEET

AerSMASH in AHU (Air Handling Units)



**AerSMASH for clean indoor air
and quality retention of your products**

AerSMASH pure improvement.

AerSMASH in AHU

In air handling units, AerSMASH provides applications suitable for the elimination of bacteria, fungi and odors. The products are placed directly in existing AHUs or by means of a bypass to be created. The units are standard equipped with preprogrammed control, plasma cartridges with integrated electrostatic discharge (ESD) and mounting accessories.


Material high-quality SS 316 material

Capacity Suitable for spaces up to 26000 M³

Plug & Play 220-240 V, 50-60 Hz, middels 2-polige stekker, kabel lengte 1,5 meter

Quarantee 24 months after installation or 36 months after delivery, with the exception of cartridges and pre-filters, which must be replaced according to use.

Afmeting adapted to the location

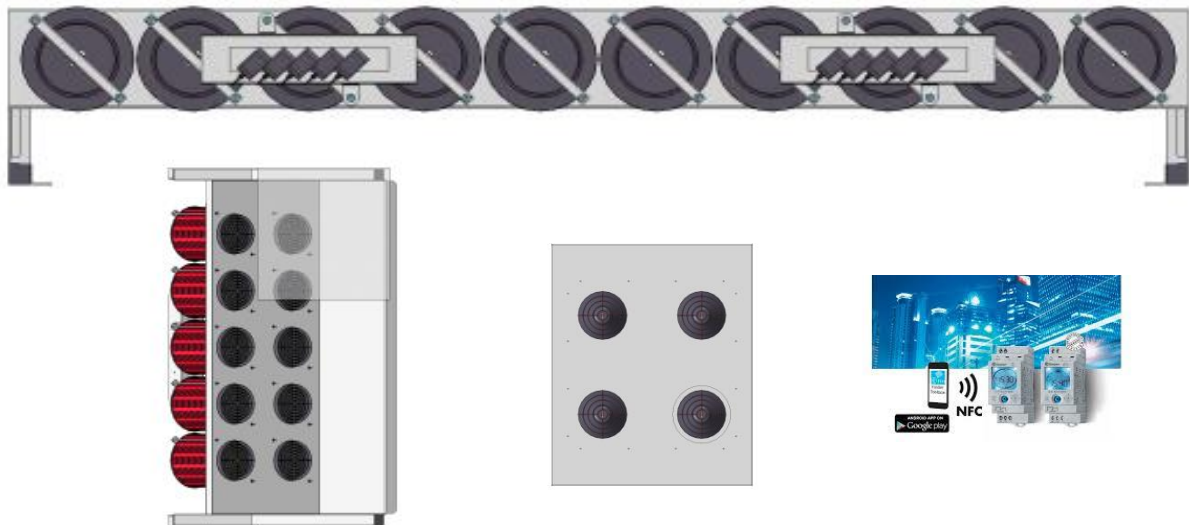

Technische gegevens

Sealing	EPDM	
Cartridge	12V, plastic (ABS), 24 Watt per unit	
CE	Yes	Declaration of conformity
Certifications	NEN-EN-IEC 60335-1:2012 EN60335-2-65:2003 +A1:2008+ NEN-EN-IEC C1: 2004+A11:2012 EN50366:2003 +A1:2006 or EN 62233:2008 NEN-EN-IEC 60730-1:2011 EN 60335 DIN EN 60335-2-65:2003 EMC (2004/108/EC): EMC (2006/95/EC) Protection Class III Appliance	