



PRODUCT DATASHEET

AerSMASH TYPE: AS3000



**AerSMASH for clean indoor air
and quality retention of your products**

AerSMASH

pure improvement.

AerSMASH Type AS3000

Type AS3000 is suitable for the elimination of bacteria, fungi and odors for rooms with a capacity of 2300 m³ per hour. The units are standard equipped with safety valves, pre-filtering, pre-programmed control, plasma cartridges with integrated electrostatic discharge (ESD) and motor.

Housing The boxes are made of high-quality SS 316 material. Including 4x lifting eye

Capacity Per hour 2300 M³

Weight 150 - 200 kgs

Plug & Play 220-240 V, 50-60 Hz, through 4-pole plug, cable length 1.5 meter , max 3,8A


Guarantee 24 months after installation or 36 months after delivery, with the exception of cartridges and pre-filters, which must be replaced according to use.

NFC Units are equipped with a Near Field Communication (NFC) for wireless setting. This is set ex works in accordance with the application at the customer.

NFC Units zijn voorzien van een Near Field Communication(NFC) voor draadloos instellen. Deze wordt af fabriek ingesteld conform de toepassing bij de klant.

Dimensions in mm

L	B	H
2850	995	720

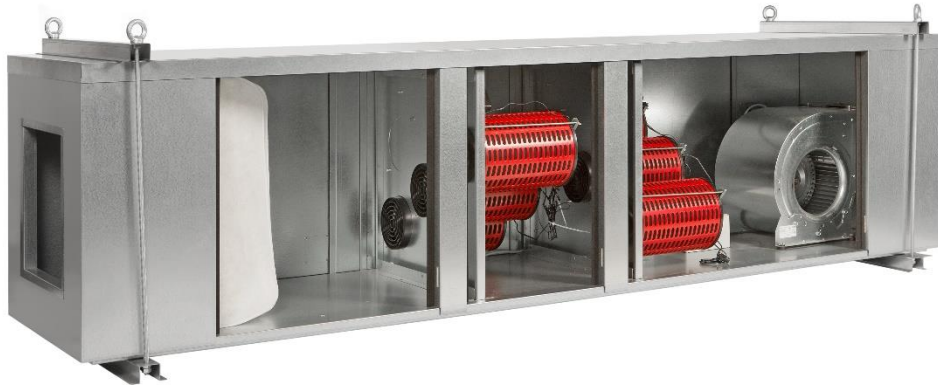

Technical data

Sealing	EPDM	
Motor	DA-9/7 CM/AL; 373 Watt	
Cartridge	12V, plastic (ABS), 24 Watt per unit	
Pre filter	High Efficiency Particulate Air (hepa)	
CE	Yes	Declaration of conformity
Certifications	NEN–EN-IEC 60335-1:2012 EN60335-2-65:2003 +A1:2008+ NEN-EN-IEC C1: 2004+A11:2012 EN50366:2003 +A1:2006 or EN 62233:2008 NEN-EN-IEC 60730-1:2011 EN 60335 DIN EN 60335-2-65:2003 EMC (2004/108/EC): EMC (2006/95/EC) Protection Class III Appliance	